


Zitrux compact MOUNTING

UNPACKING

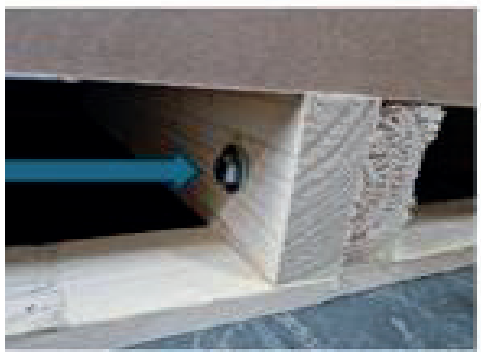



Divide the pallet in 2 by releasing both bolts and nuts.

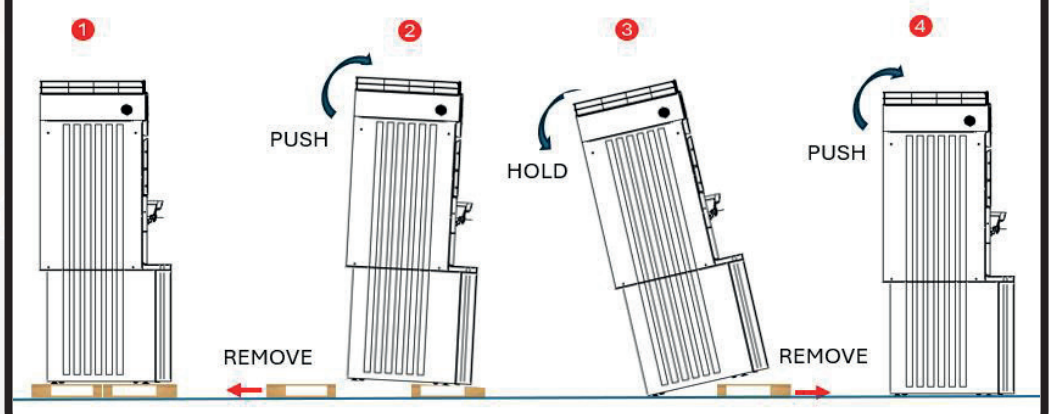


Unload the machine from the pallet to the floor.


LOCATION




Gap on Left hand and Rear side
=> 300mm


LEVELING

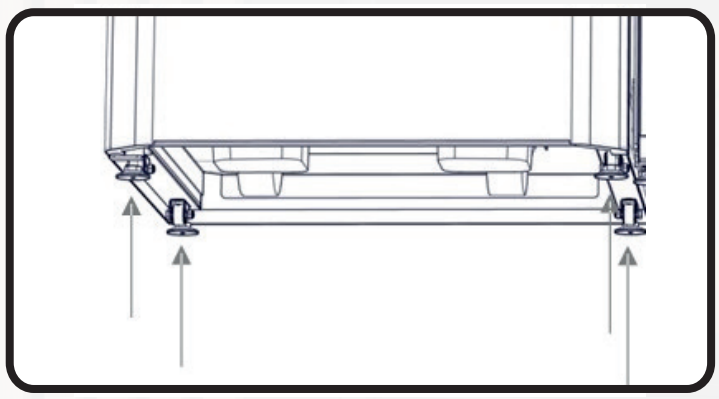

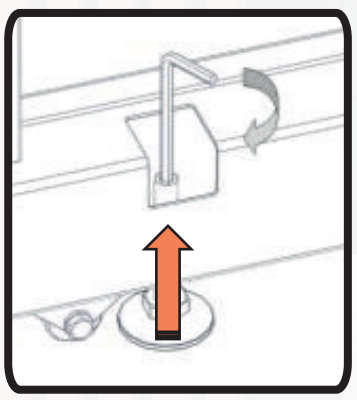

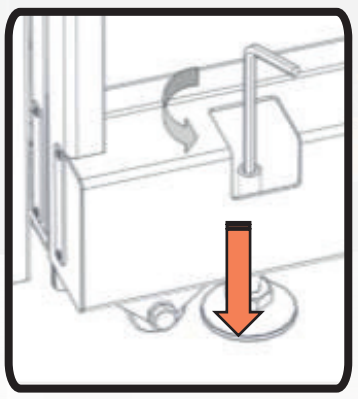

Turn all 4 feet clockwise/counterclockwise to move Up/Down the machine.

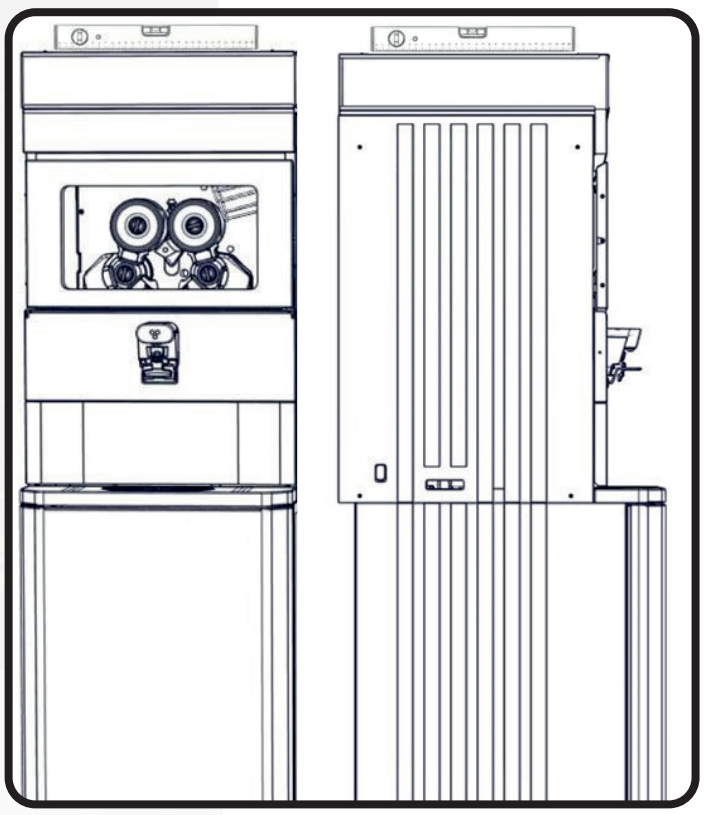

Use a level to check the result

CONNECTIONS



-Preinstalled water hose (3m) already in the machine. Required a 3/4" Male tap

-Min water pressure 2bar - Max water pressure 10bar

-A softener is recommended whenever local hardness of water exceeds Zumex recommendations (between 5ºfH and 8ºfH).

-Check your local regulations. You may need to install a non-return valve to prevent water from flowing back.

- Always wear gloves, corrosive product.
- Use ONLY detergents recommended by ZUMEX:
  - EcoLab MIP SMX
  - Diversey Polypro
- The use of other detergents will void the warranty.

Insert the hose in the tank and then reset the detergent level:

Settings > Cleaning > Detergent > Refill button

NOTE: Resetting the detergent level is mandatory each time the tank is replaced.




Zitrux compact MOUNTING

CONNECTIONS


Preinstalled drain hose (1.8m) in the machine to connect to:

Scenario A. open drain
-Mandatory: rigid PVC pipe to drain water at 72ºC
-Min diameter => 40mm
-Min height => 40mm

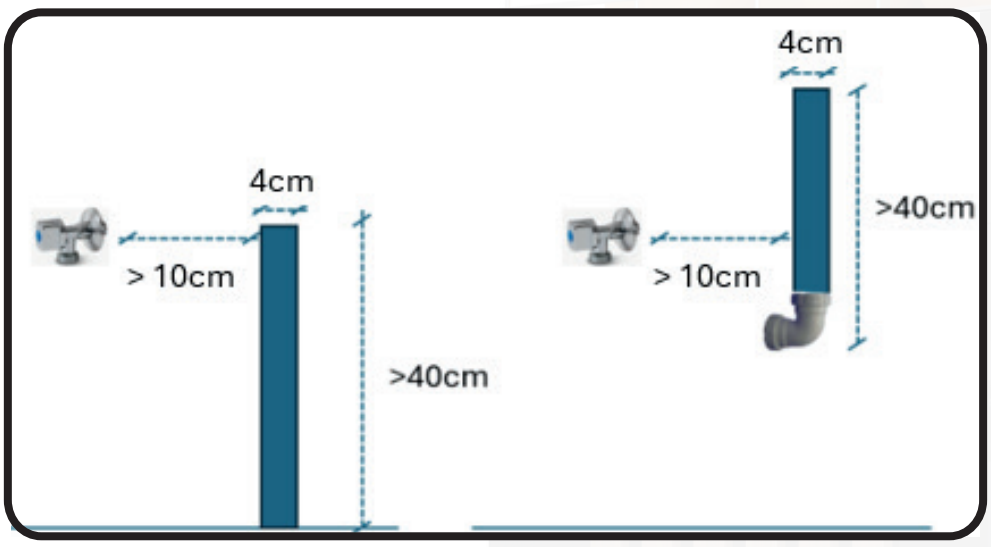


Scenario B. closed drain
-Mandatory rigid PVC antiodor/siphon system to resist water at 72ºC.
-Mandatory: metal clamps



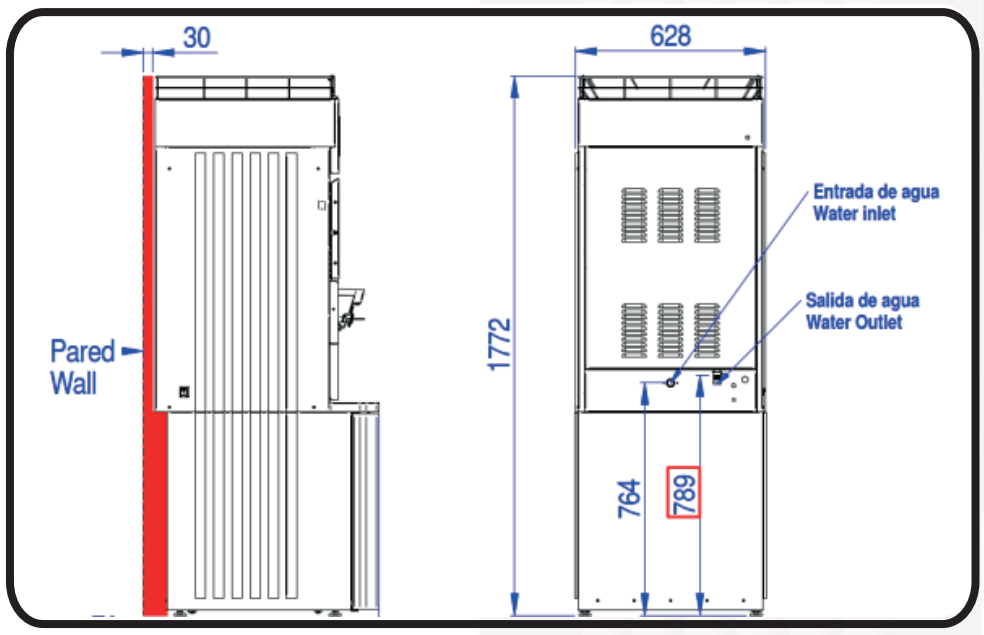

POWER

Dedicated power supply circuit =>3kw/16A

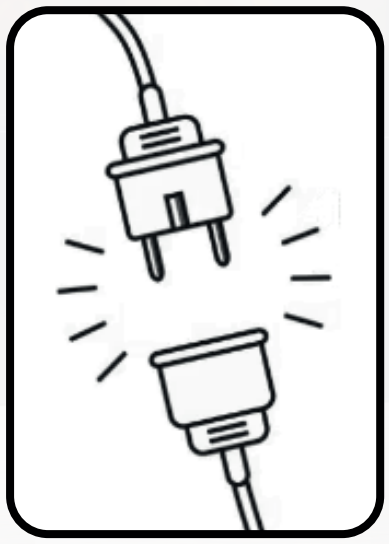

RINSING

IMPORTANT
-Use the Rinsing feature ONLY to rinse detergent residues from the capsule after a manual cleaning or prior the first use.
-Do not use the Rinsing feature to sanitize the machine or remove pulp from the squeezing system.
-Always proceed cleaning the drain filter right after a rinsing.

